

Firmware Update Procedures

SE-2600 & HS-2600

This document provides procedures for updating the SE-2600 HD 8-Channel Digital Video Switcher and HS-2600 HD 8-Channel Portable Video Streaming Studio.

Updating the SE-2600 HD 8-Channel Digital Video Switcher & HS-2600

HD 8-Channel Portable Video Streaming Studio Firmware


(SW v1.3.2.3+KBv1.1.4)

What items you should prepare before updating the firmware

- The latest SE-2600 firmware update zip file x 1 or the latest HS-2600 firmware update zip file x 1.
The latest SE-2600 firmware zip file can be downloaded from the SE-2600 product page of the Datavideo official website <https://www.datavideo.com/product/SE-2600> . The latest HS-2600 firmware file can be downloaded from the HS-2600 product page of the Datavideo website <https://www.datavideo.com/product/HS-2600> .
After the downloaded firmware zip file is unzipped, you can see that there is one zip file.
➤ **se3200_se2600_USB_v1.3.2.3_kb_v175_114_boot_install:**
- SE-2600 x 1 or HS-2600 x 1
- DC 12V, 82W power adapter x 1(for SE-2600) or DC12V, 11A power adapter x1 (for HS-2600)
- USB 2.x or 3.x USB Flash Drive(with the FAT or the FAT32 file system) x 1
- Monitor x 1

This document describes how to perform firmware update on a **Windows** computer.

System Connection Diagram

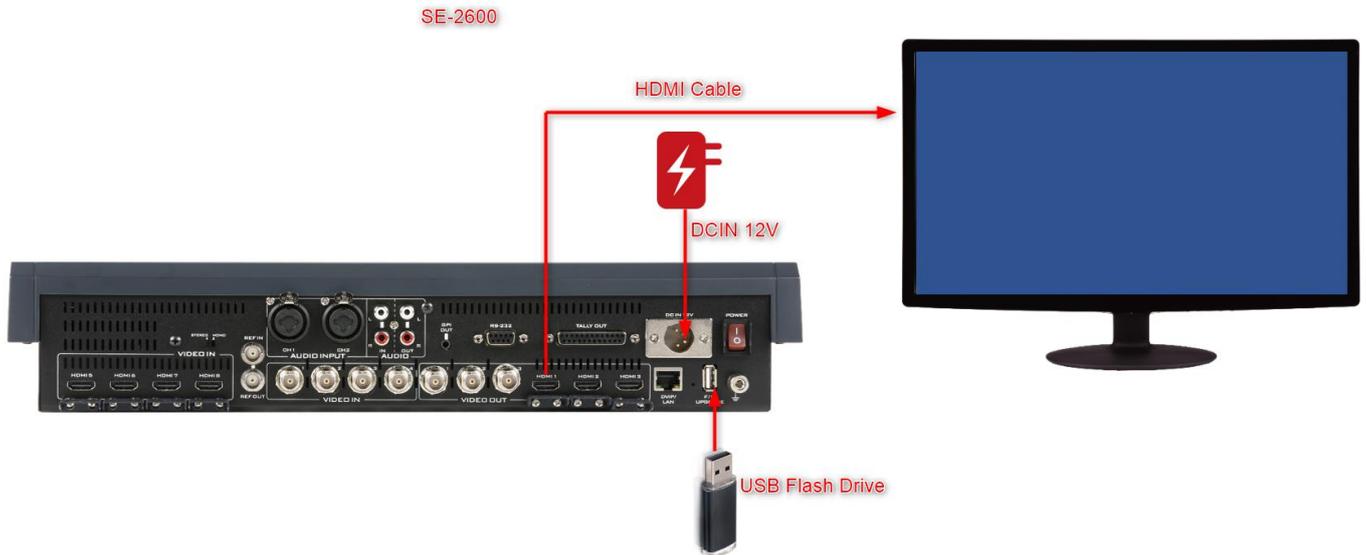

[Checking the Firmware Version](#)

Page 3

[Updating the Firmware-SE-2600](#)

Page 6

[Updating the Firmware-HS-2600](#)

Page 8

Checking the Firmware Version

● For SE-2600 & HS-2600

Please note that the SE-2600 and HS-2600 share the same firmware.


1. At first, please connect your SE-2600 or HS-2600 according to the System Connection Diagram.
2. Please turn on the power of the SE-2600 or HS-2600.
3. Please press the [MENU] key that is located on the control panel of the SE-2600 or HS-2600.



4. After the [MENU] key is pressed, the OSD menu of the SE-2600 or HS-2600 will be shown. We will use SE-2600 as an example in this section.



5. Please press the [up/down] arrow keys to move to the [Setup] option.



6. You can see that the current firmware version (SW, FW, KBD & OS) will be shown in the [Setup] option.



Updating the Firmware-SE-2600

1. Please make sure that the downloaded firmware is unzipped, and then please unzip the “se3200_se2600_USB_v1.3.2.3_kb_v175_114_boot_install” zip file. After that, you will see a “Datavideo” file folder.
2. Please save the “Datavideo” file folder into the root directory of your USB flash drive.
3. After the “Datavideo” file folder is copied successfully, please remove the USB flash drive from your laptop.



3. Please make sure your SE-2600 is connected according to the “System Connection Diagram”. After that, please connect your USB flash drive to the “F/W UPGRADE” port which is located on the rear panel of the SE-2600.



4. Please turn on the power of the SE-2600.

5. After the SE-2600 is powered on, please press the [MENU] button  from the control panel to open the OSD menu.

6. Please use the down-arrow key  to select the "Setup" option.



7. Please use the right-arrow  and down-arrow  keys to select the "Software Upgrade" option.



8. Once the “Software Upgrade” option is selected, please press the “ENTER” button , and then you will see a “Software Upgrade” dialogue box.



9. Please use the left  and right  arrow keys to select the “Yes” button and then press the “ENTER” button .



10. The “Yes” button will be shown in red  and the firmware update procedure will be started.

11. After the Yes/No dialogue box disappears, please turn off and then turn on the power of the SE-2600.

12. The firmware update procedure is done successfully.

Updating the Firmware-HS-2600

1. Please make sure that the downloaded firmware is unzipped, and then please unzip the “se3200_se2600_USB_v1.3.2.3_kb_v175_114_boot_install” zip file. After that, you will see a “Datavideo” file folder.
2. Please save the “Datavideo” file folder into the root directory of your USB flash drive.
3. After the “Datavideo” file folder is copied successfully, please remove the USB flash drive from your laptop.



3. Please make sure your HS-2600 is connected according to the “System Connection Diagram”. After that, please connect your USB flash drive to the “F/W UPGRADE” port which is located on the rear panel of the HS-2600.



4. Please turn on the power of the HS-2600.

5. After the HS-2600 is powered on, please press the [MENU] button  from the control panel to open the OSD menu.

6. Please use the down-arrow key  to select the "Setup" option.




7. Please use the right-arrow  and down-arrow  keys to select the "Software Upgrade" option.






8. Once the “Software Upgrade” option is selected, please press the “ENTER” button, and then you will see a “Software Upgrade” dialogue box.

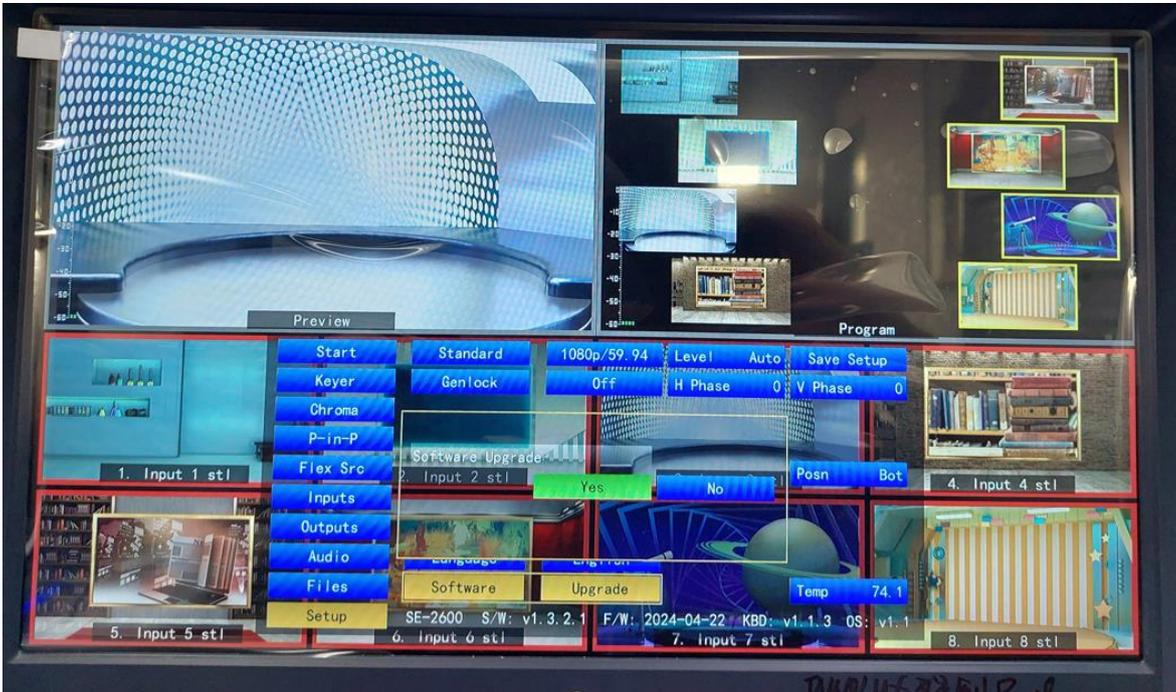

9. Please use the left  and right  arrow keys to select the “Yes” button and then press the “ENTER” button .



10. The “Yes” button will be shown in red  and the firmware update procedure will be started.

11. After the Yes/No dialogue box disappears, please turn off and then turn on the power of the HS-2600.

12. The firmware update procedure is done successfully.